

Type B8Q Load Cell

mega ENDÜSTRİYEL
TARTI SİSTEMLERİ

SERVİS | YAZILIM | OTOMASYON | PROJE

1145/10 Sk. No:4 Yenışehir/Konak/İZMİR * info@megatarti.com * www.megatarti.com * 0232 433 10 70



Short description



Stainless steel IP67 shear beam load cell
Low profile
Suitable for hopper, floor and other electronic
scales
Current calibrated (SC-option)



test certificate no. TC7809 Revision 0
C of C no R60/2000-NL1-10.14 Revision 1



Certificate no. 12-029

Available models

Capacity	Accuracy	Full article description
200kg	C3 Excluded from OIML	B8Q-C3-200kg-3B-SC(-W6)
500kg	C3	B8Q-C3-500kg-3B-SC(-W6)
1000kg	C3	B8Q-C3-1000kg-3B-SC(-W6)
2000kg	C3	B8Q-C3-2000kg-3B-SC(-W6)

Type B8Q Load Cell

Detailed specifications B8Q

1145/10 Sk. No:4 Yenışehir/Konak/İZMİR * info@megatarti.com * www.megatarti.com * 0232 433 10 70

Accuracy class		C3	OIML R60 C3
Output sensitivity (= FS)	mV/V	2.0 ± 0.002	
Maximum capacity (E _{max})	kg	200	500, 1000, 2000
Max.number of load cell intervals	n _{LC}	3000	
Ratio of min. LC verification interval	Y = E _{max} / v _{min}	10000	15000
Combined Error	%FS	≤ ± 0.0230	
Minimum dead load	Of E _{max}	0%	
Safe overload	of E _{max}	150 %	
Ultimate overload	of E _{max}	300 %	
Zero balance	of FS	< ± 1.0 %	
Excitation, recommended voltage	V	5 ~ 12	
Excitation maximum	V	18	
Input resistance	Ω	1106 ± 5	
Output resistance	Ω	1000 ± 3	
Insulation resistance	MΩ	≥ 5000 (at 50VDC)	
Compensated temperature	°C	-10 ~ +40	
Operating temperature	°C	-35 ~ +65	
Storage temperature	°C	-40 ~ +80	
Element material		Stainless steel	
Ingress Protection (acc. to EN 60529)		IP67	
Recommended torque on fixation	Nm	M12: 75	

bolts

Wiring

Wiring:


Shielded, 4 conductor cable.

Cable diameter: Ø5mm.

Standard cable length: 3m.

Shield not connected to element.

4-wire diagram

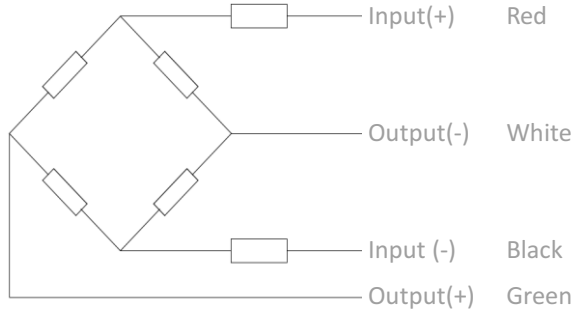


Type B8Q Load Cell


Dimensions in mm

1145/10 Sk. No:4 Yenışehir/Konak/İZMİR * info@megatarti.com * www.megatarti.com * 0232 433 10 70

Standard version

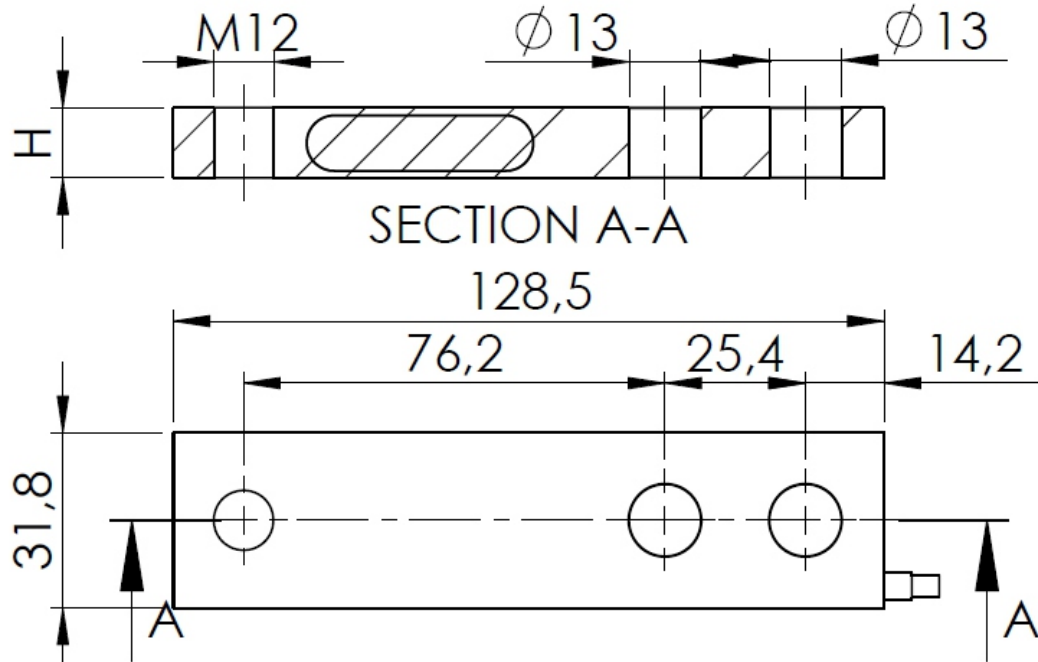

Option W6 version ("T" end loading hole)

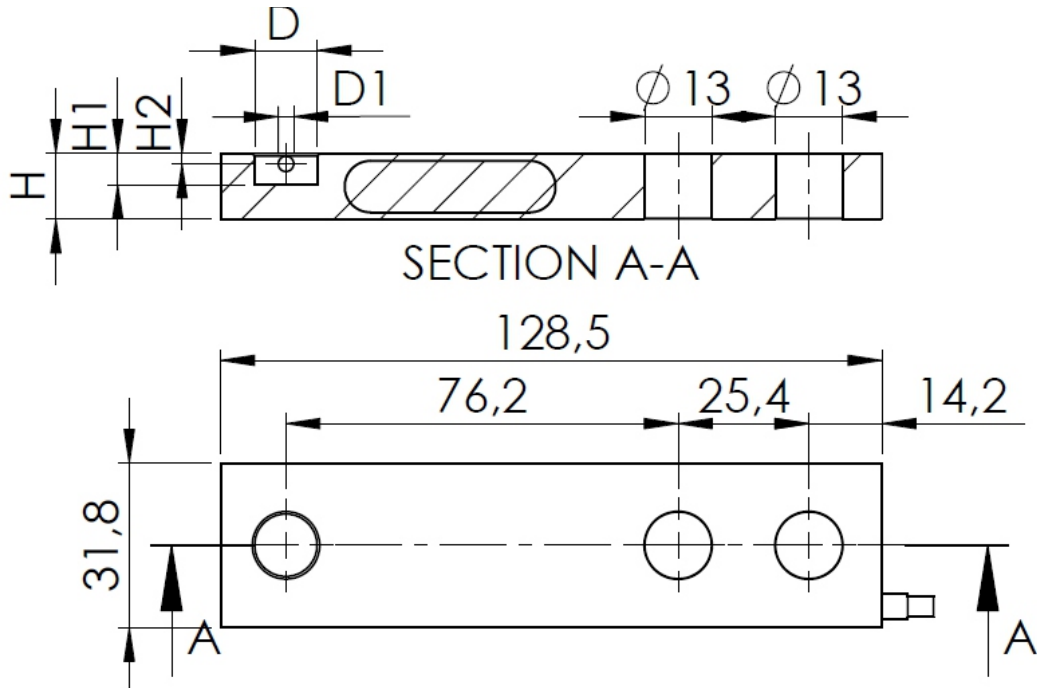




Dimension Capacity	H	H1	H2	ØD	ØD1
200kg	12.7	6	2	12.1	3
500kg	15.9	9.5	2.8	18.1	4
1000kg	19.1	9.5	2.8	18.1	4
2000kg	25.4	9.5	2.8	18.1	4

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Type B8Q Load Cell

Available accessories

1145/10 Sk. No:4 Yenışehir/Konak/İZMİR * info@megatarti.com * www.megatarti.com * 0232 433 10 70

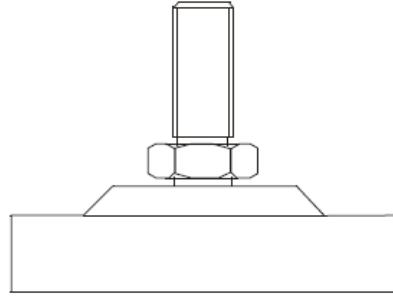BJ-8-202-0.5-5t foot Ø60-80 and height 92-105 mm Stainless Steel Adjustable height	
BJ-8-205-0.5-2t foot Ø88 and height 105 mm Easy installation Adjustable height Automatically centralized inside Good ability of anti-side loading Mainly used for platform scales, floor scales and other electronic weighing devices	
BJ-8-215-0.5-2t foot Ø81 and height 48 mm Easy installation Adjustable height Automatically centralized inside Good ability of anti-side loading Mainly used for platform scales, floor scales and other electronic weighing devices	
BJ-8-250-0.2-2t foot Ø60-80 and height 30-51 mm Easy installation Suitable for W6 option	